



PATENT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of) CUSTOMER NO. 37003
)
SHERWOOD et al.) Confirmation No. 8579
)
Application No.: 10/849,745) Group: 3672
)
Filing Date: May 20, 2004) Examiner: n/a
)
Title: METHOD AND APPARATUS FOR LIFTING) Docket N°: 57.0498 US NP
LIQUIDS FROM GAS WELLS)

I hereby certify that this correspondence is being deposited with the United States Postal Service on the date shown below with sufficient postage as first class mail in an envelope addressed to: Commissioner for Patents, Alexandria, VA 22313-1450 on September 17, 2004


Ruth A. Schreiber

9-17-04
Date


SUBMISSION OF PRIORITY DOCUMENT

Commissioner for Patents
P.O. Box 1450
Alexandria, Virginia 22313-1450

Sir:

Attached hereto is United Kingdom Patent Application N° 0312652.1, filed 3 June 2003, for the above-captioned application. Priority is claimed under 35 U.S.C. §119 and 37 CFR §1.55.

Respectfully submitted,

By: 
William B. Batzer
Registration N° 37,088

Intellectual Property Law Department
Schlumberger-Doll Research
36 Old Quarry Road
Ridgefield, Connecticut 06877-4108
Phone: (203) 431-5506
Fax: (203) 431-5640
Date: September 17, 2004

BEST AVAILABLE COPY



THIS PAGE BLANK (USPTO)



The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated 5 May 2004

**CERTIFIED COPY OF
PRIORITY DOCUMENT**

THIS PAGE BLANK (USPTO)

Patent 1977
(Rule 16)

THE PATENT OFFICE

K

- 3 JUN 2003

The
Patent
Office

03JUN03 E811899-1 002831
P01/7700 0.00-0312652.1

Request for grant of NEW PATENT

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road
Newport
South Wales
NP9 1RH

1. Your reference

57.0498 GB NP

2. Patent application number

(The Patent Office will fill in this part)

03 JUN 2003

0312652.1

3. Full name, address and postcode of the or of each applicant (underline all surnames)

Schlumberger Holdings Limited

07236326001

Patents ADP number (if you know it)

PO Box 71
Craigmuir Chambers
Road Town, Tortola
British Virgin Islands

If the applicant is a corporate body, give the country/state of its incorporation

British Virgin Islands

4. Title of the invention

METHOD AND APPARATUS FOR LIFTING LIQUIDS FROM GAS WELLS

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

William L. WANG
Schlumberger Cambridge Research Limited
High Cross
Maddingley Road
Cambridge CB3 0EL
UK

Patents ADP number (if you know it)

07626161001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)

Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

YES

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body.
- See note (d))

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form -

Description 18 ✓

Claim(s) 4 ✓

Abstract 1 ✓

Drawing(s) 9 + 9 22

10. If you are also filing any of the following, state how many against each item.

Priority documents -

Translations of priority documents -

Statement of inventorship and right to grant of a patent (Patents Form 7/77) 1 (plus 3 copies)

Request for preliminary examination and search (Patents Form 9/77) 1 ✓

Request for substantive examination (Patents Form 10/77) 1 ✓

Any other documents -
(please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature



Date

2 June 2003


12. Name and daytime telephone number of person to contact in the United Kingdom
William L. WANG,
01223 325268

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

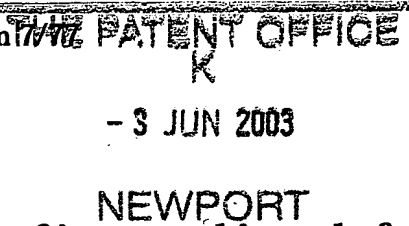**The
Patent
Office**

7/77

**Statement of inventorship and of
right to grant of a patent**

The Patent Office

Cardiff Road
Newport
South Wales
NP9 1RH

1. Your reference

57.0498 GB NP

2. Patent application number

(if you know it)

03 JUN 2003

0312652.1

3. Full name of the or of each applicant

Schlumberger Holdings Limited

4. Title of the invention

METHOD AND APPARATUS FOR LIFTING LIQUIDS FROM GAS WELLS

5. State how the applicant(s) derived the right
from the inventor(s) to be granted a patent

The Applicant and the Inventor(s) employer(s) are affiliated
Schlumberger companies. The applicant derived the right to be granted
a patent by virtue of Agreement with the employer(s) of the
Inventor(s).

6. How many, if any, additional Patents Forms
7/77 are attached to this form?

(see note (c))

7.

I/We believe that the person(s) named over the page (and on
any extra copies of this form) is/are the inventor(s) of the invention
which the above patent application relates to.

Signature

Date

2 June 2003

8. Name and daytime telephone number of
person to contact in the United KingdomWilliam L. WANG,
01223 325268**Notes**

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there are more than three inventors, please write the names and addresses of the other inventors on the back of another Patents Form 7/77 and attach it to this form.
- d) When an application does not declare any priority, or declares priority from an earlier UK application, you must provide enough copies of this form so that the Patent Office can send one to each inventor who is not an applicant.
- e) Once you have filled in the form you must remember to sign and date it.

Patents Form 7/77

Enter the full names, addresses and postcodes of the inventors in the boxes and underline the surnames

SHERWOOD, John
7 Bradrushe Fields
Cambridge
CB3 0DW
United Kingdom

Patents ADP number (if you know it):

08644031001

ATKINSON, Ian
6 Williams Close
Ely
Cambridgeshire
CB7 4FQ
United Kingdom

Patents ADP number (if you know it):

08644049001

NICHOLSON, Barry
8 Newbury Place
Carindale
Queensland 4152
Australia

Patents ADP number (if you know it):

08497463002

Reminder

Have you signed the form?

METHOD AND APPARATUS FOR LIFTING LIQUIDS FROM GAS WELLS

The present invention generally relates to an apparatus and a method for removing liquids from the bottom section of gas
5 producing wells.

BACKGROUND OF THE INVENTION

Many gas wells produce liquids in addition to gas. These liquids include water, oil, and condensate. As described in
10 the paper SPE 2198 of the Society of Petroleum Engineers of AIME, authored by R. G. Turner, A. E. Dukler, and M. G. Hubbard, "in many instances, gas phase hydrocarbons produced from underground reservoirs will have liquid-phase material associated with them, the presence of which can effect the
15 flowing characteristics of the well. Liquids can come from condensation of hydrocarbon gas (condensate) or from interstitial water in the reservoir matrix. In either case, the higher density liquid phase, being essentially discontinuous, must be transported to the surface by the
20 gas. In the event the gas phase does not provide sufficient transport energy to lift the liquids out of the well, the liquid will accumulate in the well bore. The accumulation of the liquid will impose an additional back pressure on the formation and can significantly affect the production
25 capacity of the well". Over time, accumulated liquid can cause a complete blockage and provoke premature abandonment of the well. Removal of such liquid restores the flow of gas and improves utilization and productivity of a gas well.

30 There are many technical solutions that have been suggested in the prior art to solve the problem of accumulating liquids. Some of them are described briefly by E. J. Hutlas

and W. R. Granberry in the article entitled "A Practical Approach to Removing Gas Well Liquids" in the Journal of Petroleum Technology, August 1972, p. 916-922. Others are summarized in the United States patent 5,904,209. More recent advances in operating gas and other hydrocarbon wells are found for example in the United States patents 5,636,693; 5,937,946; 5,957,199 and 6,059,040.

Submersible pumps may also be used to overcome the above-described problem. However the costs of deploying such pumps are often not justified for low margin gas wells

On the other hand, it is known that production from low pressure reservoirs can be enhanced by jet pumps and artificial lift operations. For instance, hydraulic jet pumps have been used as a down hole pump for artificial gas lift applications. In these types of hydraulic pumps, the pumping action is achieved through energy transfer between two moving streams of fluid. The power fluid at high pressure (low velocity) is converted to a low pressure (high velocity) jet by a nozzle or throat section in the flow path of the power fluid. The pressure at the throat becomes lower as the power fluid flow rate is increased, which is known as the Venturi effect. When this pressure becomes lower than the pressure in the suction passageway, fluid is drawn in from the well bore. The suction fluid becomes entrained with the high velocity jet and the pumping action then begins. After mixing in the throat, the combined power fluid and suction fluid is pumped to the surface.

30

In the light of the above background it is an object of the present invention to provide effective and economically viable methods and apparatus for cleaning gas wells.

5

SUMMARY OF THE INVENTION

In accordance with a first aspect of the invention, there is provided an apparatus for reducing the level of liquids at the bottom of a gas producing well comprising a constriction or throat section in which a production gas flow from the well generates a low pressure zone having a pressure less than the ambient formation gas pressure and at least one conduit providing a flow path from an up-stream location within said well to said low pressure zone.

15

The invention proposes to exploit the flow of the produced gas to create a differential pressure between a location that is preferably located above the producing zone and a location that represents the maximum tolerable level of liquids in the well. The latter level is preferably set below the gas producing zone and hence most preferably immediately below the lowest perforation penetrating the gas bearing formation. The height or distance that separates these two locations and over which the apparatus lifts the liquid may span more than 5 meters, in some wells even more than 15 meters.

25

Preferably, the constriction is a Venturi-type constriction having an extended section of small diameter in between two sections where the flow pipe diameter tapers from its nominal diameter to the small diameter. However other constrictions such as orifice plates may be used.

30

The flow path between the up-stream location and the low pressure zone is provided by a conduit such as a tubular pipe. The conduit is preferably straight as even a limited
5 number of bends in the tube induce a pressure drop that is lost for lifting the liquids. Its upper end preferably terminates at a location where the constriction has its minimal diameter. The conduit itself is best made of resilient material, such as steel, capable of withstanding
10 the wear and tear in a subterranean environment.

In a preferred embodiment the conduit is flexible or capable of expanding and contracting, e.g. in a telescopic manner, in the longitudinal direction. When attaching a floater to
15 its lower end, the conduit is adaptable to a changing level of liquid in the well.

In another preferred embodiment the conduit has at least one additional opening at a position between the two locations,
20 hence, in a section of the well where gas is produced and can enter the tube through the additional openings thus provided. The gas reduces the weight of the liquid flowing through the conduit.

25 Whilst the openings could in principle be located along the length of the conduit it is preferred to position them at one location distributed around the circumference of the conduit. Most preferably the number of openings is restricted to exactly one, as it was found that additional
30 openings do not result in a significantly increased performance of the apparatus.

When used in combination with an expanding or flexible conduit, it is preferred to have the additional openings arranged such that the distance to the lower end of the conduit remains constant. In this manner it is ensured that the additional openings are located at a constant height above the liquid level in the well, even when the influx of liquids into the sump of the well increases and, hence, the sump level rises.

10 In a preferred embodiment the ratio of the cross-sectional area of the additional opening and of the conduit is in the range of 0 to 1, though even larger openings in form of longitudinally extended slits could also be used.

15 According to a second aspect of the invention there is provided a method for maintaining or reducing a level of liquids at the bottom of a gas producing well comprising the steps of constricting the production gas flow at a location within the well to generate a low pressure zone having a pressure less than the ambient formation gas pressure and providing a conduit to establish a flow path from an upstream location within said well to said low pressure zone.

25 In a preferred embodiment the method comprises the further step of determining a gas flow rate, a height over which liquids have to be lifted to reach the low pressure zone and a number representing the size of the constriction such that the low pressure in the low pressure zone is sufficiently low to lift liquids over said height. Where possible these steps are performed prior to the deployment of the constriction and conduit.

These and other aspects of the invention will be apparent from the following detailed description of non-limitative examples and drawings.

5

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1A illustrates elements of an apparatus to pump liquids from the sump of a gas well in accordance with an example of the invention;

10 FIG. 1B shows a variant of the example of FIG. 1A;

FIGS. 2A-C illustrate further examples of an apparatus to pump liquids from the sump of a gas well in accordance with an example of the invention elements;

15

FIG. 3 illustrates important parameters for adapting an apparatus in accordance with the invention to a given well environment;

20

FIG. 4 is a graph useful for a process of adapting an apparatus in accordance with the invention to a given well environment;

25 FIG. 5 is a flowchart illustrating a process of adapting an apparatus in accordance with the invention to a given well environment; and

FIG. 6 is a plot comparing the performance of variants of the invention.

30

EXAMPLES

Referring first to the schematic drawing of FIG.1, there is shown a gas well **10** with casing **11** and gas production tubing **12**. Perforations **13** penetrate the casing to open a gas producing formation **101**. A sump **14** at the bottom of the well **10** is shown filled with water or hydrocarbon condensates.

The present invention proposes to latch onto the terminal end **121** of the production pipe a flow constriction **15**. A flow constriction of the type shown, often referred to as a Venturi, is known to generate a pressure differential between the constriction section and the surrounding sections of the flow pipe. The amount of the pressure differential depends mainly on the constriction dimensions, i.e. the diameter of the constriction **15** versus the nominal diameter of the production pipe **12**, and the flow rate of the medium passing through it. From the constriction section **15**, a small pipe or riser tube **16** provides a fluid communication to a location **161** closer to the bottom of the well.

At the surface, there are further gas extraction facilities **17** to produce the gas and handle its transport further downstream.

In operation gas enters the well **10** through the perforations **13** and flows through the constriction section **15**, thereby creating a differential pressure $DP = P_0 - P_1$. The lower pressure P_1 at the constriction lifts liquids from sump. The liquid exits the upper opening or nozzle **162** of the riser tube **16** as a mist or in an atomized form to be carried to the surface by the gas flow.

(
It is important to note that the pressure differential P provided by the constriction may not be sufficient to lift liquids from the sump under some flow rate regimes. To improve the device, a venting hole or opening **163** can be
5 added to the riser tube at a location between the lower end **161** of the tube **16** and its upper nozzle **162**. This variant of the present invention is shown in FIG. 1B.

Through the venting hole **163**, gas from the production zone
10 can enter the conduit and mix with the liquids. The resulting mixture has a lower density and can thus be lifted higher by the same differential pressure.

In FIG. 2A, there is show another example of an arrangement
15 in accordance with the present invention making use of similar or identical elements to those in the examples described above and hence using similar or identical numerals to refer to those. In the present example, however, a riser tube **26** is arranged in an off-centered position
20 relative to the constriction **25**. The riser tube is essentially straight without bends and less of an obstacle within the constriction. The nozzle **262** is located above the throat or narrowest section of the Venturi in a zone where the pressure differential may be slightly reduced when
25 compared to the pressure differential within the throat section itself. However the advantages of having a straight riser tube may outweigh this loss. A venting opening **263** is provided near the bottom end **261** of the riser pipe **26**.

30 In the variant of FIG 2B, the riser tube **26** terminates in a funnel **262** that bends to open into the section of the constriction **25** that has the smallest diameter and, hence

the highest differential pressure. The opening **262** broadens so as to minimize the pressure drop due to the bend in the flow path of the liquid. A venting opening **263** is provided near the bottom end **261** of the riser pipe **26**.

5

A further variant as illustrated in FIG. 2C, the riser tube **26** carries at its end a floating element **264**. In connection with a flexible section **265** of the tube, the floater ensures that the opening **263** is maintained at a constant height above the liquid level **14** in the well **10**. The floater element **264** can be a gas tight housing. The flexible section **265** can be implemented as expansion bellows such as shown in FIG. 2C, or as a telescopic joint, or, in fact, as a compliant part of the tube **26** that bends or straightens slightly in dependence of the position of the floater.

15

Though the precise parameters determining the location and dimensions of the intermediate opening **163**, **263** or openings are to be described in more detail below, it is the role of the hole to allow the passage of production gas into the liquid flow within the riser tube **16**, **26**. The resulting gas/liquid mixture has a lower weight than the liquid and, even a low flow rate of the production gas can be used to lift liquids from the sump. Or, alternatively, the length (or height) of the riser tube **16**, **26** and, thus, the height through which the liquid is lifted can be increased at an otherwise constant gas flow rate from the well.

20

25

In the following a detailed description of important design and other parameters is given that can be applied for the purpose of installing and operating devices in accordance

30

with the present invention. Reference is made to FIG. 3 that depicts parameters and coordinates as used in the following.

The Venturi pump **30** in which the main flow of gas creates a differential pressure which is used to lift liquid from the sump **S** at the bottom of the well to the Venturi throat **V**, where it will be atomized and then carried upwards with the main gas flow. Liquid droplets may subsequently touch the wellbore walls and form a thin liquid film which flows back downwards, so the process may require several stages.

If the pressure difference between location **S** and **V** given by $P = P_S - P_V$ is sufficiently large, liquid can be lifted from **S** to **V**, a total height $H_t = H_1 + H_2$. Liquid will not flow unless the pressure difference P can overcome the hydrostatic head, i.e. unless

$$[1] \quad P > D_l g (H_1 + H_2)$$

where D_l is the density of the liquid and g the acceleration due to gravity. The pressure difference P generated by the Venturi is likely to be small, so that the height $H_1 + H_2$ will be small. Under these conditions the Venturi has to be placed sufficiently close to the pool of liquid to be lifted.

If relation [1] is not valid, gas (of density $D_g < D_l$) can be introduced into the vertical riser tube at the aperture **A_i**, so that the density of the gas-liquid mixture in the pipe **31** is reduced to $D_m < D_l$, with D_m sufficiently small that

$$[2] \quad P > D_l g H_1 + D_m g H_2$$

In a typical well several parameters are available for optimization amongst which there are the differential pressure P generated by the Venturi constriction, the height H_1 of the gas inlet and its cross-sectional area A_i and the cross-sectional area A_t of the riser tube.

The differential pressure DP in a Venturi due to the flow of the produced gas can be estimated using

$$[3] \quad DP = (1/2) D_g U_{gv}^2 (1 - k^4)$$

where U_{gv} is the gas velocity in the constriction and k is diameter of the Venturi constriction as a fraction k of the nominal diameter d_w of the gas production tube. The hydrostatic pressure drop in the gas-filled well is added to this pressure DP to obtain

$$[4] \quad P = (1/2) D_g U_{gv}^2 (1 - k^4) + D_g g (H_1 + H_2)$$

The flow can be analyzed in terms of the liquid velocity U_l in the lower riser tube (of length H_1), the ratio $A = A_i / A_t$ of the gas inlet cross-sectional area A_i to that of the riser tube A_t , $B = A \sqrt{D_l / D_g}$ where "sqrt" denotes the square root operation, and $G = H_2 g D_l / P$. The latter parameter G can be interpreted as a non-dimensional number indicating the capability of the device to lift liquids from the sump S with $G = 1$ corresponding to the case where the differential pressure P would just be capable of lifting liquid a minimum distance H_2 required for the operation of the device.

Using the above parameters an approximation of P can be calculated as

$$P = (1/2) U_1^2 D_1 (1 + 2A^2 + 2B (1 + Dg/D_1) \sqrt{1 + G H_1 / (U_1^2 H_2)}) + (1 + 2A^2) D_1 g H_1 + H_2 g D_1 / F_1$$

where F_1 is the liquid volume fraction

$$F_1 = 1 / (1 + B \sqrt{1 + G H_1 / (H_2 U_1^2)})$$

Equation [5] can be evaluated either numerically or approximatively. In FIG. 4 there is shown a plot of $U_1^2 D_1 / 2P$ as a function of H_1 / H_2 for different values of the parameter B (Curves a, b, c, d).

When using the novel devices it is important to know the differential pressure P that can be generated by the Venturi pump, given the expected gas flow rate Q in the well, together with the height H_2 through which the liquid is lifted. With the knowledge of P, an estimate can be determined of a likely value for G, preferably using a minimal likely value for P. Using then a value of B such that $B > G-1$. To optimize the liquid flow rate, it is preferred to make B as small as possible whilst maintaining the condition $B > G-1$ above. A plot similar to that in FIG. 4 can be used to derive an expected liquid velocity U_1 , and then select the cross-sectional area A_t of the main riser tube so that the volumetric flow rate ($U_1 A_t$) pumped upwards exceeds the rate at which water is thought to be entering the well.

The above steps are set out in the flow chart of FIG. 5 including the steps of:

1. Determining a reasonable value for $A = A_i/A_t$ (STEP 50).
- 5 The area A_i of the hole through which gas enters the main riser tube (which lifts liquid to the Venturi throat at V in FIG. 3) is likely to be of the order of the cross-sectional area A_t of the riser tube itself. For example $A = 0.5$ is a possible choice.
- 10 2. Given the densities D_l of water and the downhole density D_g of gas, $B = A \sqrt{D_l/D_g}$ can be estimated (STEP 51).
3. Assuming that the height H_2 is known by which water must
15 be lifted for the device to be functional, i.e., without the opening A_i being blocked, the differential pressure P that has to be generated by the Venturi constriction can be determined (STEP 52).
- 20 4. The non-dimensional quantity $G = H_2 g D_l / P$ must be smaller than $B + 1$ for the device to operate, and a reasonably safety margin is given by for example the choice $G = 2(B + 1)^2 / (4B + 3)$. This gives a value for G and a design target for P . If $G < 1$ it would be possible to lift
25 water to a height H_2 without the introduction of gas, however the present example is based on the assumption that $G > 1$.
5. For the design of the Venturi the value k for the ratio
30 of the Venturi throat diameter to its inlet diameter is the most pertinent design parameter. Furthermore an estimate or knowledge of the downhole velocity U_g of the gas and the

downhole gas density D_g is required (STEP 53). The differential pressure $DP = (1/2) D_g U_{gv}^2 (1 - k^4)$ allows the calculation of the constriction parameter k (STEP 54).

5 The value of k must not be so small that the Venturi is likely to become blocked. In case the resulting value of k turns out to be too small (STEP 55), a value of G closer to the maximum $B + 1$ could be chosen (STEP 56), with the risk that such a design would be closer to the theoretical
10 operating limit and would therefore be less robust.

6. If the gas flow rate in the well is high, the value of k obtained in step 5 will be very close to 1 (STEP 57). Under such conditions the amount of gas required to lift the water
15 in the main riser tube is reduced, thereby reducing uncertainty from the design by allowing for a smaller throat diameter (e.g. $k = 0.5$). This leads to an increase in the pressure differential P and the above design procedure can be reversed in order to select A (STEP 58), which will be
20 smaller than the value $A = 0.5$ chosen in STEP 50 as the starting point for the design. Thus in a well with sufficient gas flow there is a greater degree of freedom in choosing the parameters k and A .

25 7.. The water or condensate level within the well is a distance H_1 below the point at which gas enters the main riser tube. For the device to operate we require $H_1/H_2 < 1/G$. The range of acceptable values for H_1 is therefore not large, and a preferred choice for H_1 is close to the value
30 $H_2/(2G)$, or within the immediate vicinity of the bottom opening of the riser tube.

8. Equation [5] can be evaluated numerically or through approximations in order to predict the liquid velocity U_l in the bottom section of the riser tube. Typical results of equation [5] are illustrated in FIG. 4. The choice of U_l enables the selection of the diameter of the main riser tube (STEP 59). This diameter is preferably small compared to the diameter of the well and small compared to the throat of the Venturi constriction, in order to ensure that the pressures in the Venturi are not adversely affected by too large an injection of gas/liquid mixture.

The following description represents a way of applying the above steps to a specific well.

15 The gas flow rate in the well is $0.22 \times 10^6 \text{ m}^3/\text{day}$ at STP (1 bar, $15^\circ \text{C} = 288 \text{ K}$). The downhole pressure and temperature are assumed to be 38 bar and 50 degrees C.

Assuming that the gas is ideal, the volumetric flow rate at downhole conditions is $0.079 \text{ m}^3/\text{s}$. The gas production tubing inner diameter ID is 4.4 inches. The tubing cross-sectional area is $S = 9.8 \times 10^{-3} \text{ m}^2$ so that the downhole velocity in the tubing is $v_d = 8.1 \text{ m/s}$. A gas gravity of 0.65 can be assumed, corresponding to gas density at standard conditions of 0.78 kg/m^3 . The density D_g of the gas at downhole conditions is 25.3 kg/m^3 .

The differential pressure generated by a Venturi with ratio of throat to inlet diameters $k = 0.5$ is 12.4 kPa (1.8 psi) using equation [3]. Evaluating the non-dimensional quantity $G = H_2 g D_l / P$, the pressure required to lift liquid a

height H_2 divided by the pressure differential generated by the Venturi. The density of water is $D_l = 1000 \text{ kgm}^{-3}$.

If $H_2 = 15 \text{ m}$ then $G = 11.9$; whereas if $H_2 = 40 \text{ m}$ then $G = 31.6$.

5

With a smaller Venturi constriction of $k = 0.35$, the differential pressure generated is 54.5 kPa (7.9 psi). If $H_2 = 15 \text{ m}$ then $G = 2.7$; whereas if $H_2 = 40 \text{ m}$ then $G = 7.2$.

- 10 Choosing a value for $B = A \sqrt{D_l/D_g}$ wherein the ratio $A = A_i/A_t$ of the gas inlet cross-sectional area A_i to that of the riser tube A_t , and D_g is the downhole gas density. If $B < G - 1$ the device will not operate, because insufficient gas enters the main riser.

15

The four values of G found above correspond to minimum values $B = 10.9, 30.6, 1.7, 6.2$ and hence to minimum values $A = 1.7, 4.9, 0.27, 0.99$. The first two values are considered not small enough to be valid (inlet area

- 20 exceeding riser tube area) The last value is close to the practical limit, and corresponds to a gas inlet which has the same cross-sectional area as that of the main riser tube. The most viable design based on the above calculation corresponds to a Venturi with $k = 0.35$ and $H_2 = 15 \text{ m}$, for
- 25 which $B = 3$ (leaving an additional safety margin compared to the minimum value of 1.7) and $A = 0.48$.

- 30 Looking at the desired flow rate of 80 m^3 of water for every million m^3 of gas (at standard conditions), the rate at which water must be raised is $17.6 \text{ m}^3/\text{day} = 2 \times 10^{-4} \text{ m}^3 \text{ s}^{-1}$.

FIG. 4 shows that the velocities are typically greater than $U_l = 1.0 \text{ m s}^{-1}$. The main riser tube therefore has to have an

area $2 \times 10^{-4} \text{ m}^2$, which corresponds to a pipe of diameter 1.6 cm, which may be compared with the tubing inner diameter 11.17 cm.

- 5 The Venturi can be hung onto the tubing level with the top of the perforations with the riser tube bridging the perforated production zone of about 15 m depth, so that water is lifted by $H_2 = 15 \text{ m}$. The design above indicates that the Venturi has preferably a throat/inlet diameter ratio $k = 0.35$, as $k = 0.5$ would not suffice, and that the lift height $H_2 = 15 \text{ m}$ can be attainable. The main riser which lifts water to the Venturi throat would have a diameter of 1.6 cm and a cross-sectional area $A_t = 2 \text{ cm}^2$. The area A_i of the gas inlet through which gas enters the main riser would be $A_i = 0.48 A_t$.

- Further experimental data are shown in FIG.6, which illustrates the effects of differently sized venting holes (such as openings 163, 263 in FIGs. 1 and 2). In the graph, the ordinate values indicate the flow rate of liquid extracted from a sump measured in cubic meters per hour. The abscissa indicates the differential pressure in Pascal. The experiment without venting hole - corresponding to a device as shown in FIG. 1A - is denoted by diamond shaped markers. The values derived from an experiment with a 1mm diameter hole are plotted as squares. And the values derived from an experiment using a 3mm hole are plotted as triangles.

- The experiments demonstrate the beneficial effects of an additional opening at low DP. In addition it is shown that there is a drop in performance when using a larger opening area A_i .

(

While the invention has been described in conjunction with the exemplary embodiments described above, many equivalent modifications and variations will be apparent to those skilled in the art when given this disclosure. Accordingly, the exemplary embodiments of the invention set forth above are considered to be illustrative and not limiting. Various changes to the described embodiments may be made without departing from the spirit and scope of the invention.

10

CLAIMS

1. An apparatus for maintaining or reducing a level of liquids at the bottom of a gas producing well comprising
5 a constriction or throat section in which a production gas flow from the well generates a low pressure zone having a pressure less than the ambient formation gas pressure and

10 at least one conduit providing a flow path from an up-stream location within said well to said low pressure zone.

2. The apparatus of claim 1 wherein constriction is a Venturi.

15

3. The apparatus of claim 1 wherein the conduit has additional openings for the entry of formation gas at locations between the up-stream location and the low pressure zone.

20

4. The apparatus of claim 1 wherein the conduit has additional openings for the entry of formation gas at essentially one location between the up-stream location and the low pressure zone.

25

5. The apparatus of claim 4 having the additional openings located around the circumference of the conduit at the essentially one position between the up-stream location and the low pressure zone.

30

6. The apparatus of claim 3 wherein the conduit has a single opening for the entry of formation gas at a position

between the up-stream location and the low pressure zone

7. The apparatus of claim 3 wherein the conduit is adapted to maintain an essentially constant distance between the openings and the level of liquids in the well.

8. The apparatus of claim 1 wherein the conduit is essentially straight.

9. The apparatus of claim 1 wherein the conduit terminates above a section of the constriction where the constriction has its smallest diameter.

10. The apparatus of claim 1 wherein the conduit terminates in a section of the constriction where the constriction has its smallest diameter.

11. The apparatus of claim 1 wherein the conduit terminates below a section of the constriction where the constriction has its smallest diameter.

12. The apparatus of claim 1 wherein the up-stream location is below a lowest gas producing perforation.

13. The apparatus of claim 1 wherein the constriction is located above a gas producing zone of perforations.

14. The apparatus of claim 1 wherein the constriction is located above a gas producing zone of perforations and the upstream location is located below said zone.

15. The apparatus of claim 1 wherein the tube has a

length of more than 5 meters.

16. The apparatus of claim 3 wherein ratio of the cross-sectional area of the additional opening and of the tube is in the range of 0 to 1.

17. A method for maintaining or reducing a level of liquids at the bottom of a gas producing well comprising the steps of

10 constricting the production gas flow at a location within the well to generate a low pressure zone having a pressure less than the ambient formation gas pressure and

15 providing a conduit to establish a flow path from an up-stream location within said well to said low pressure zone.

18. The method of claim 17 further comprising the step of determining a gas flow rate, a height over which liquids have to be lifted to reach the low pressure zone and a number representing the size of the constriction such that the low pressure in the low pressure zone is sufficiently low to lift liquids over said height.

19. The method of claim 17 further comprising the step of latching a flow constriction onto a bottom section of production tubes in the well.

20. The method of claim 17 further comprising the step of providing at least one opening in the conduit for the entry formation gas into said conduits.


(
21. The method of claim 20 further comprising the step of maintaining the position of at least one opening at a essentially constant height above the level of liquid in the well.

5

ABSTRACT

A downhole apparatus and method for maintaining or reducing the level of liquids at the bottom of a gas producing well is described including a constriction or throat section, such as a Venturi, in which a production gas flow from the well is used to generate a low pressure zone having a pressure less than the ambient formation gas pressure and at least one conduit providing a flow path from an up-stream location within said well to said low pressure zone. The conduit may have additional opening for production gas to enter the conduit.

THIS PAGE BLANK (USPTO)

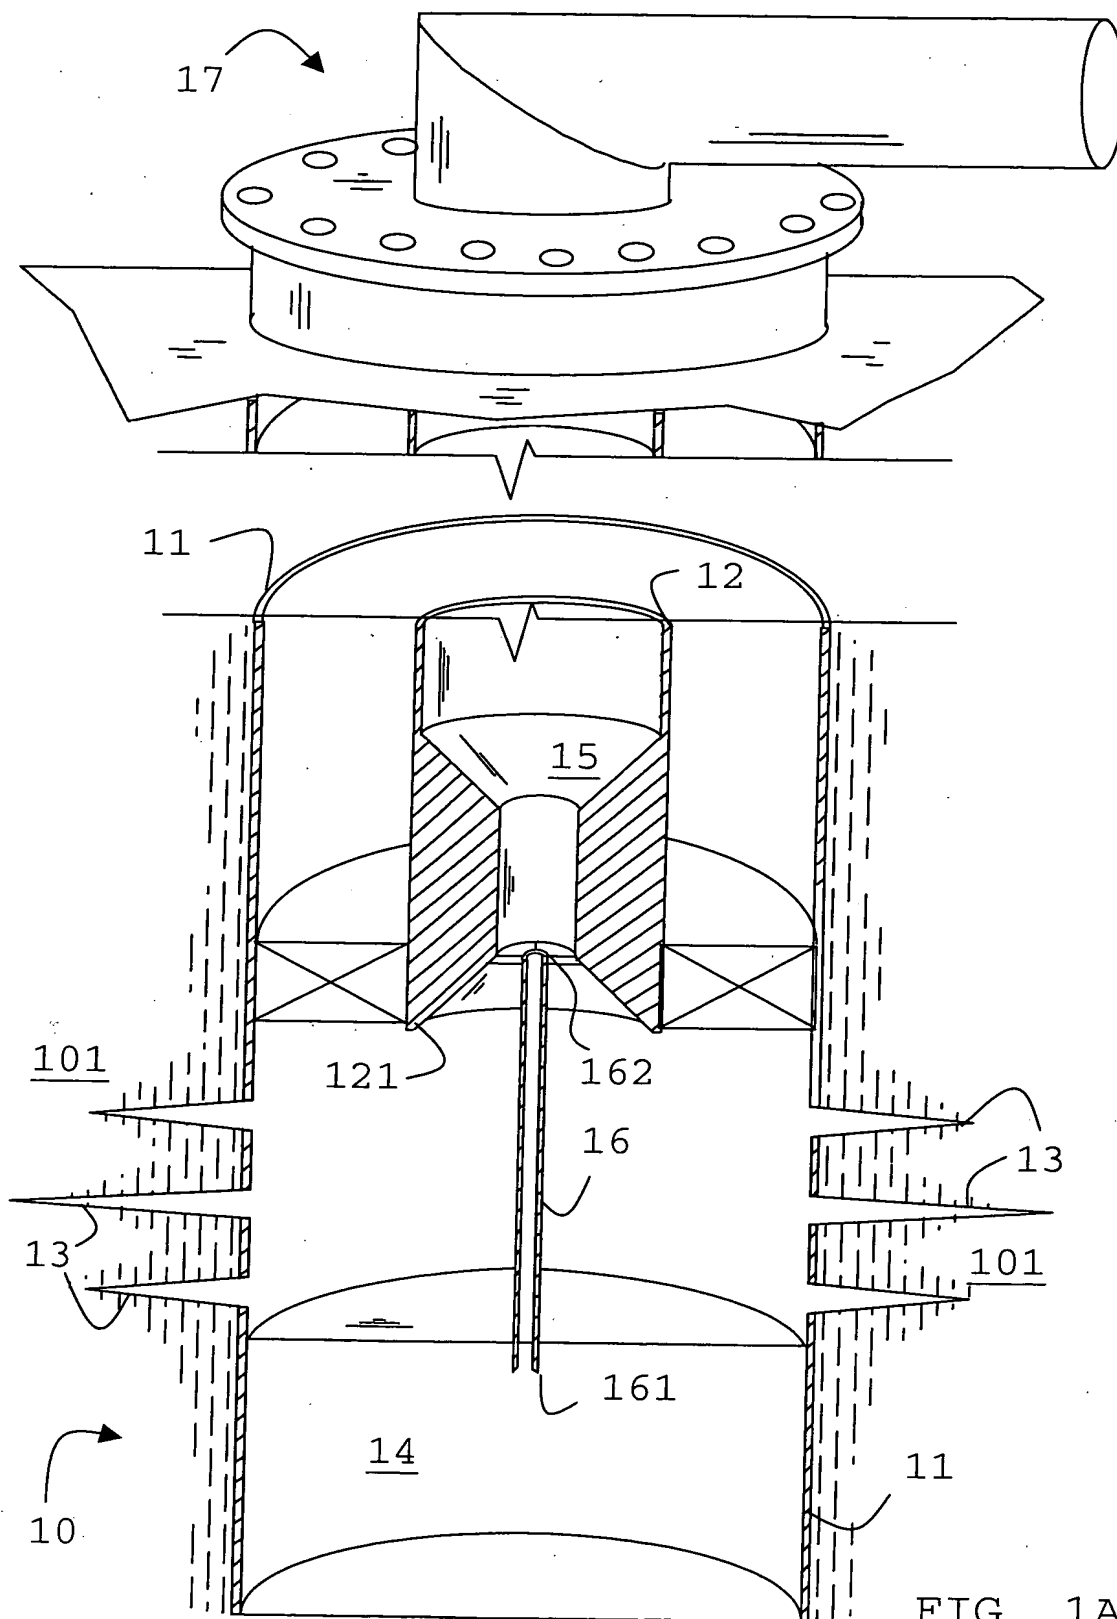

THIS PAGE BLANK (USPTO)

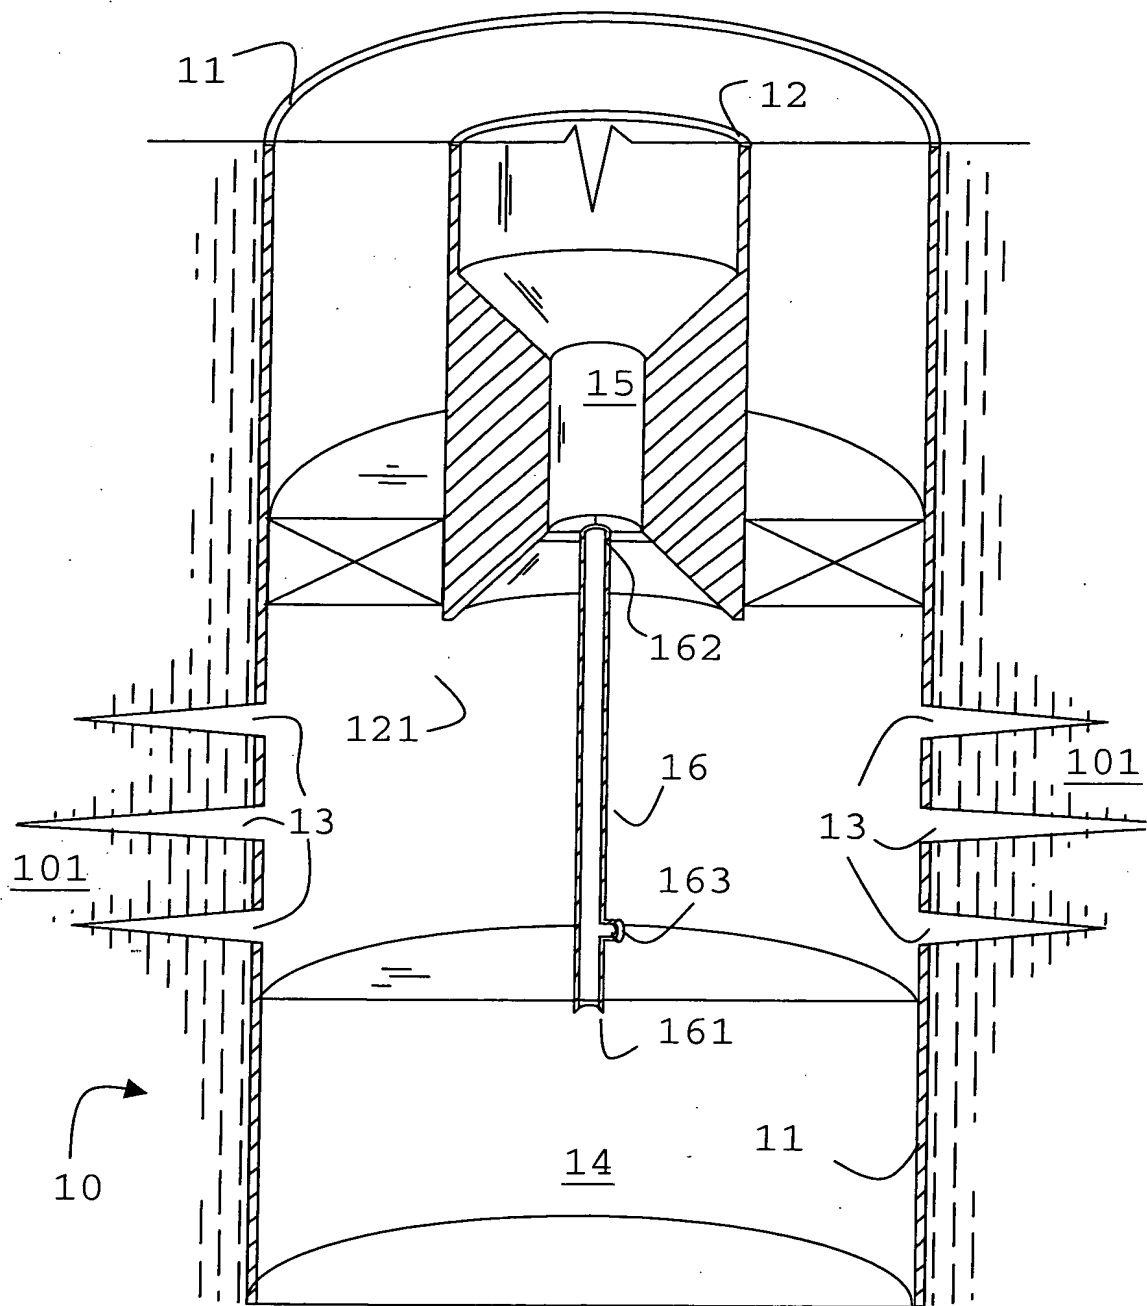


FIG. 1B

THIS PAGE BLANK (USPTO)

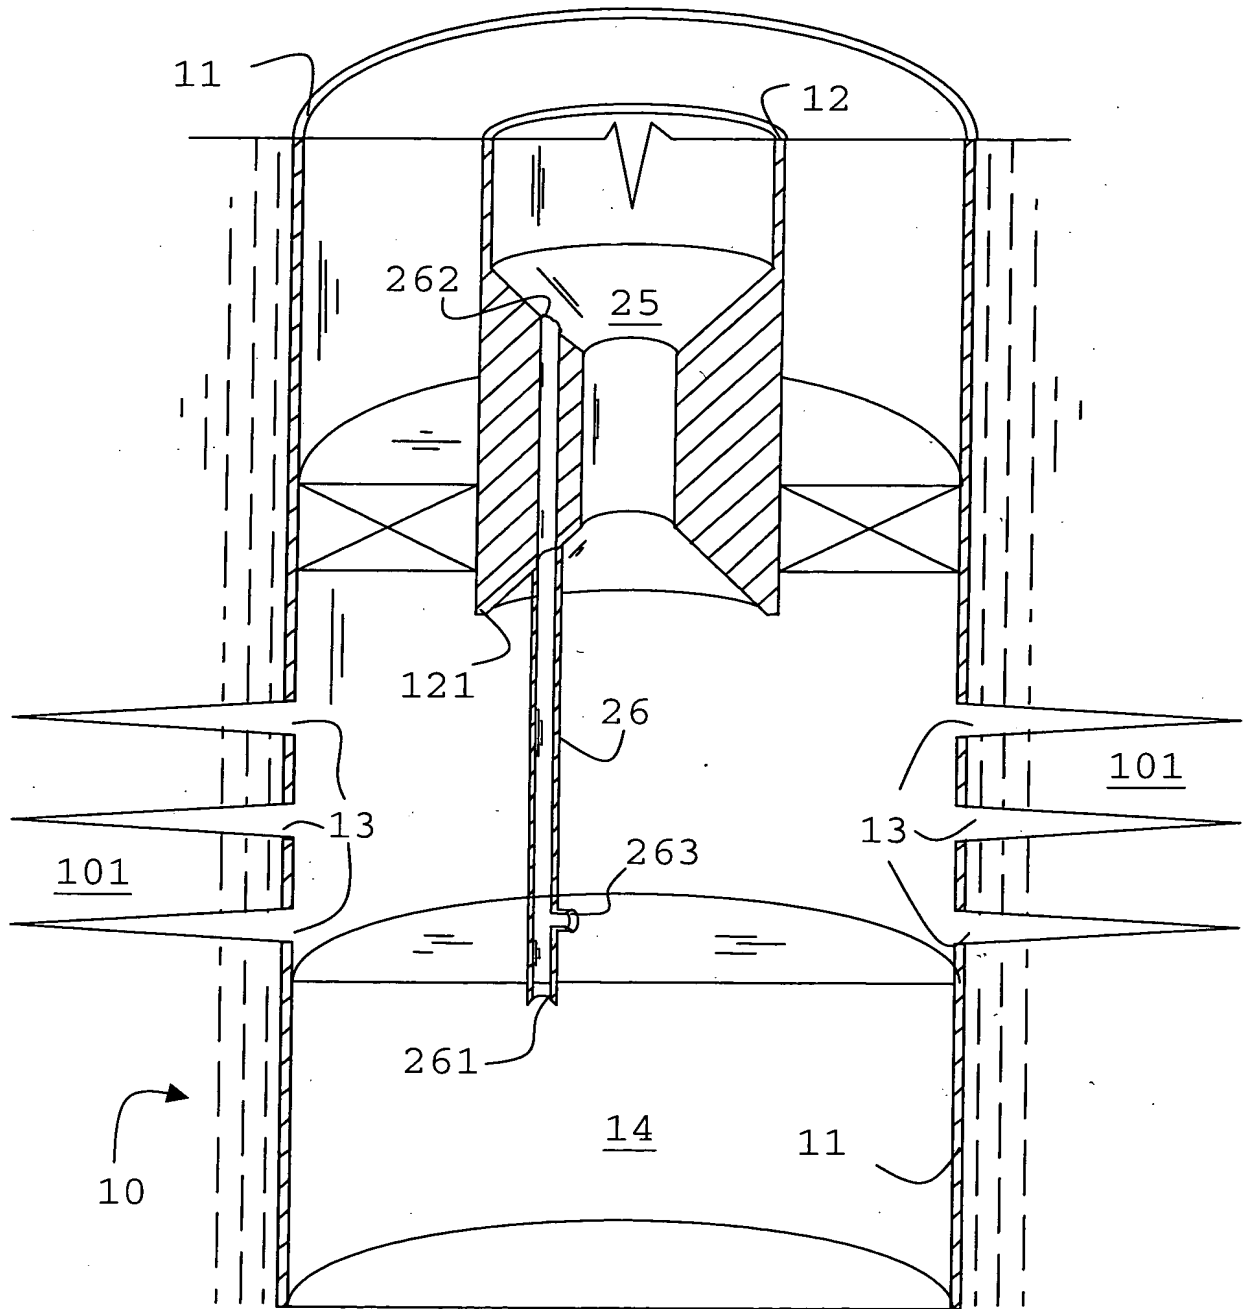


FIG. 2A

THIS PAGE BLANK (USPTO)

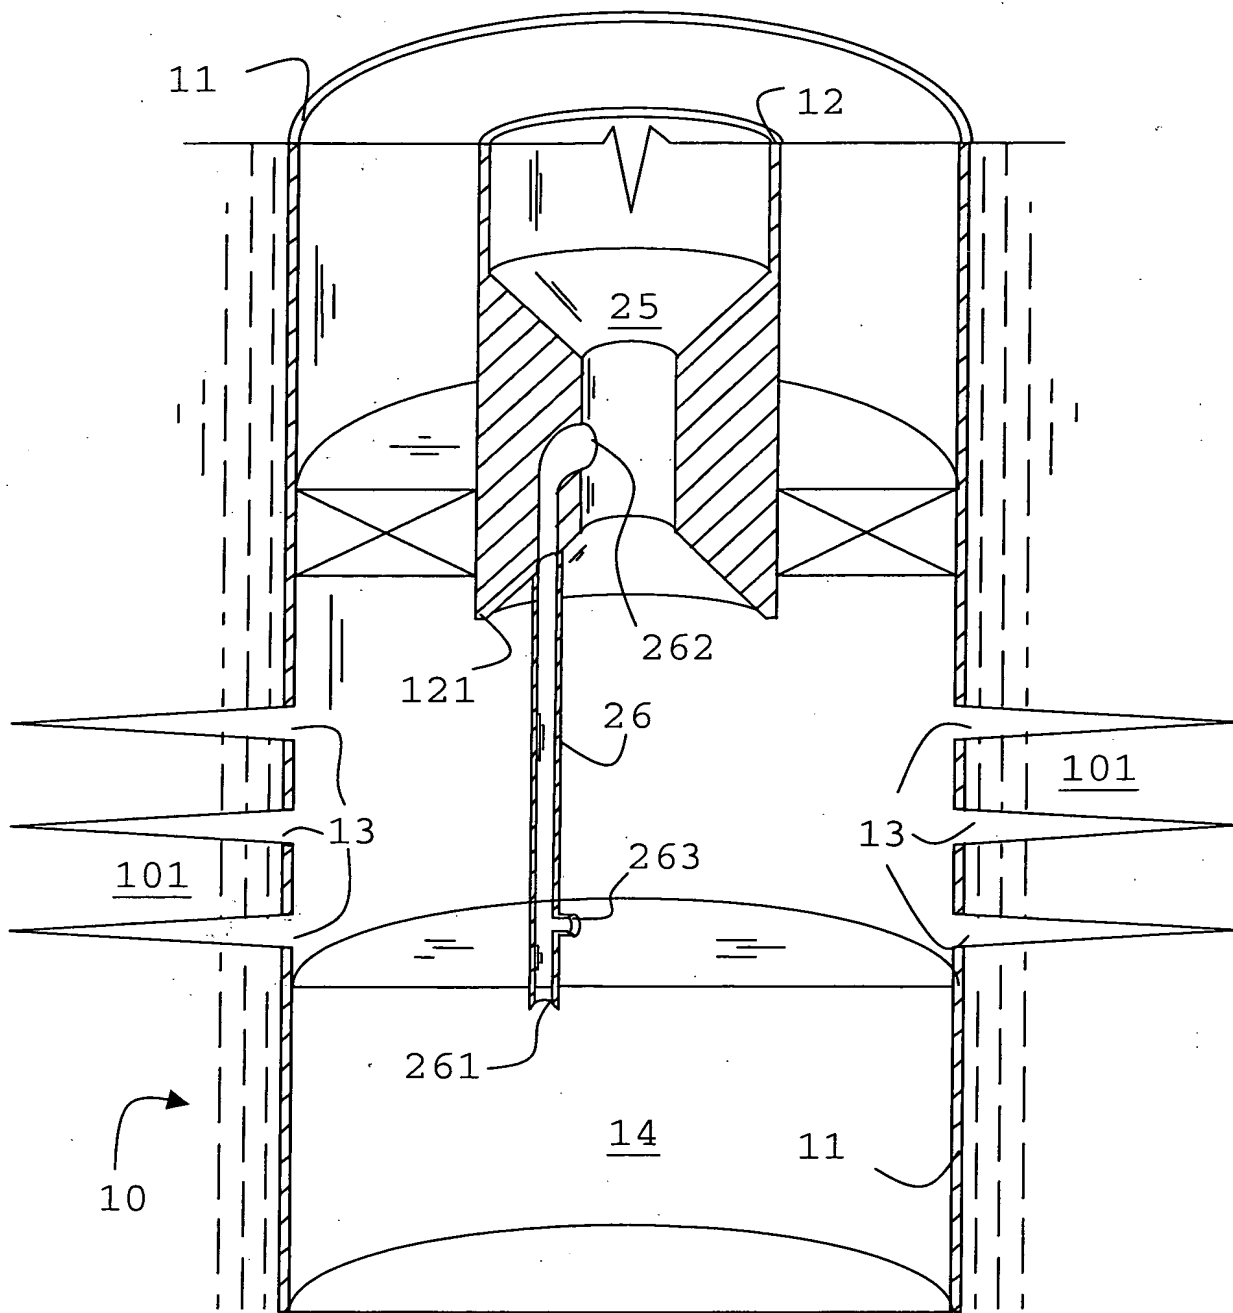


FIG. 2B

THIS PAGE BLANK (USPTO)

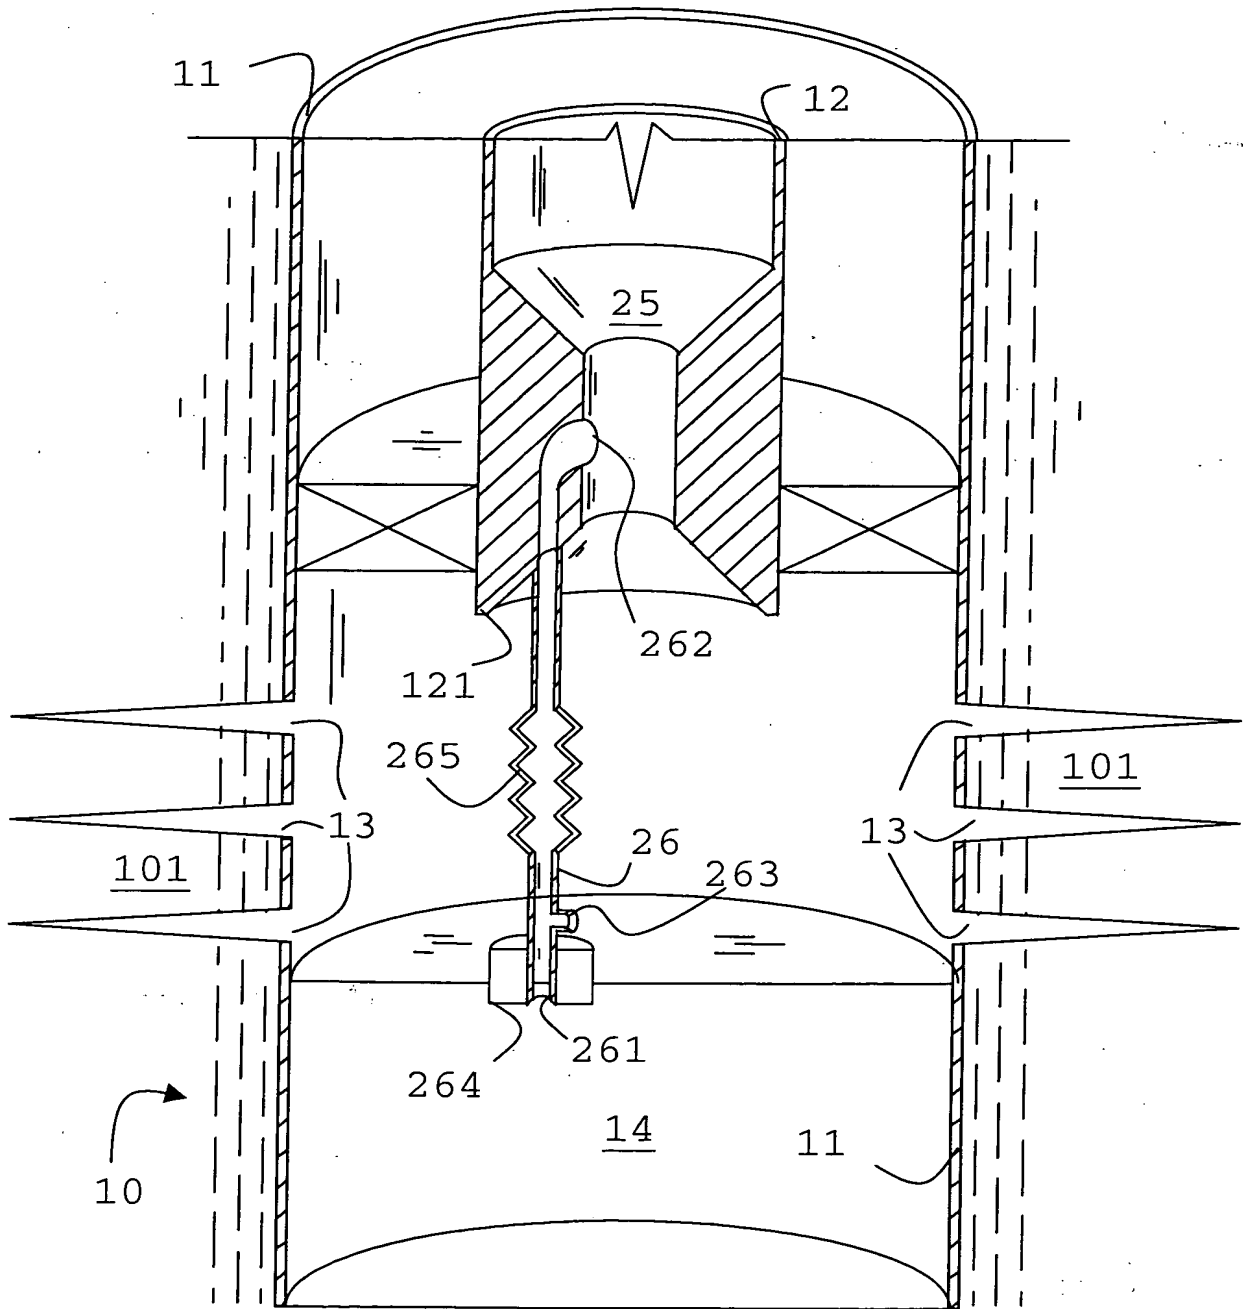


FIG. 2C

THIS PAGE BLANK (USPTO)

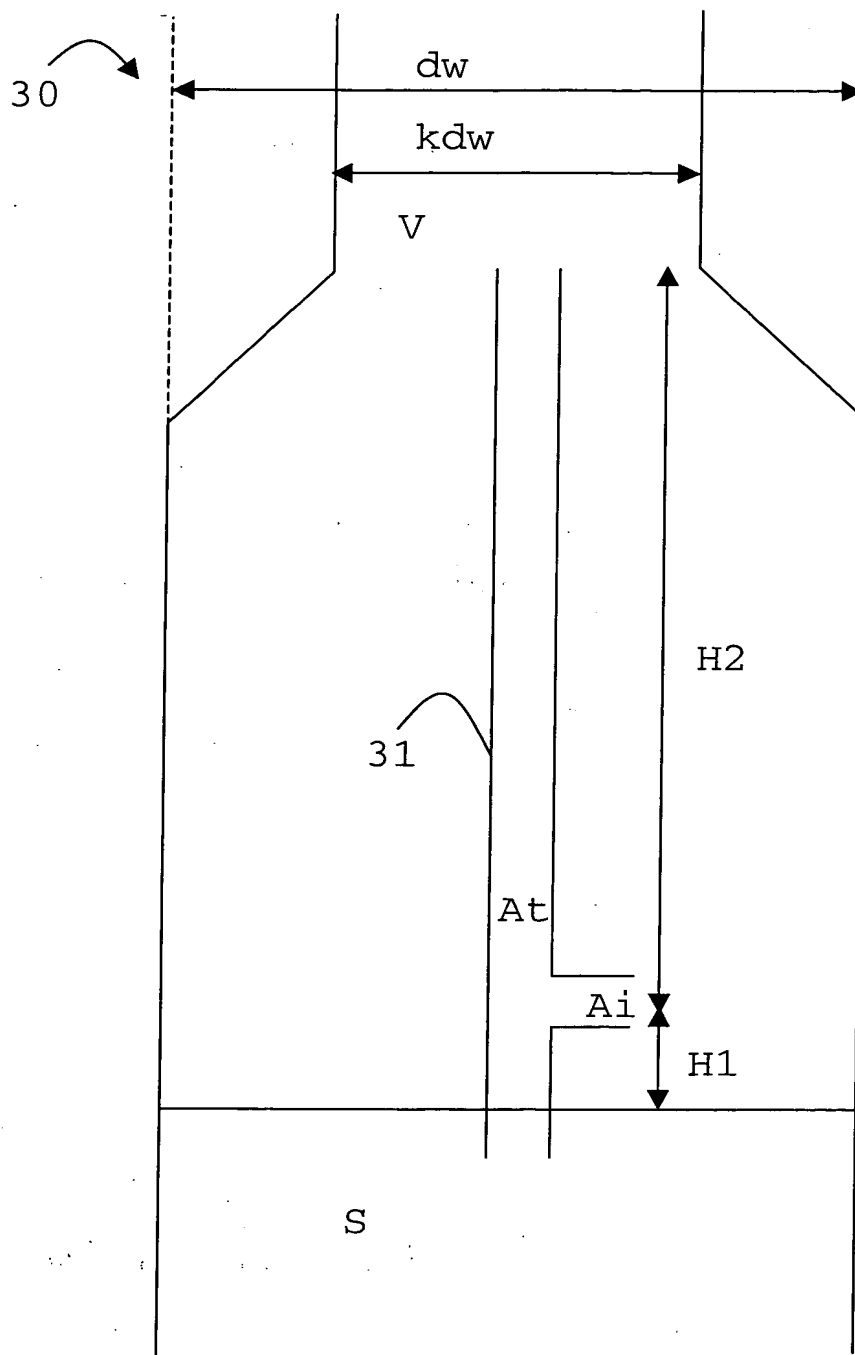


FIG. 3

THIS PAGE BLANK (USPTO)

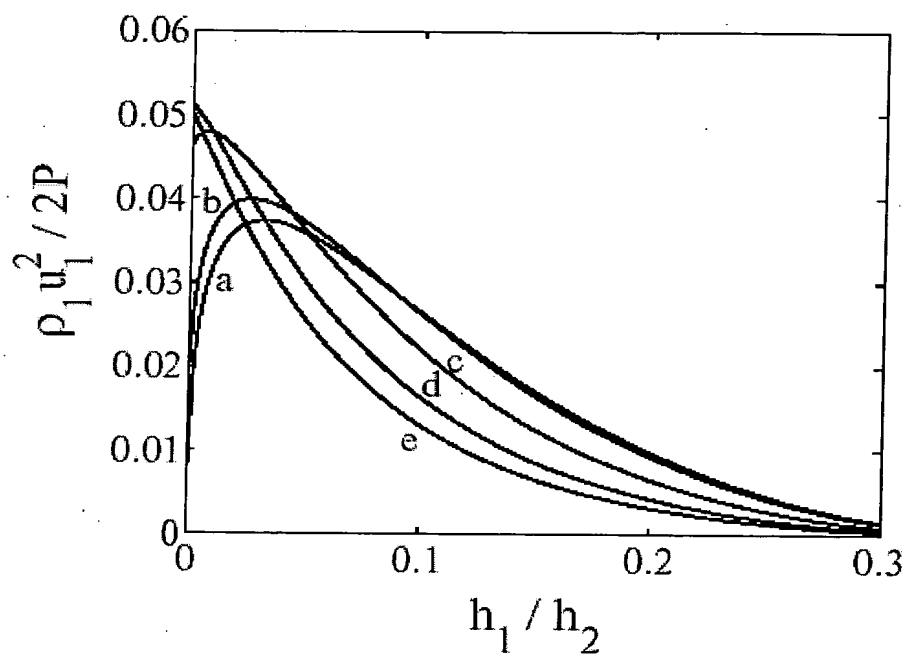


FIG. 4

THIS PAGE BLANK (USPTO)


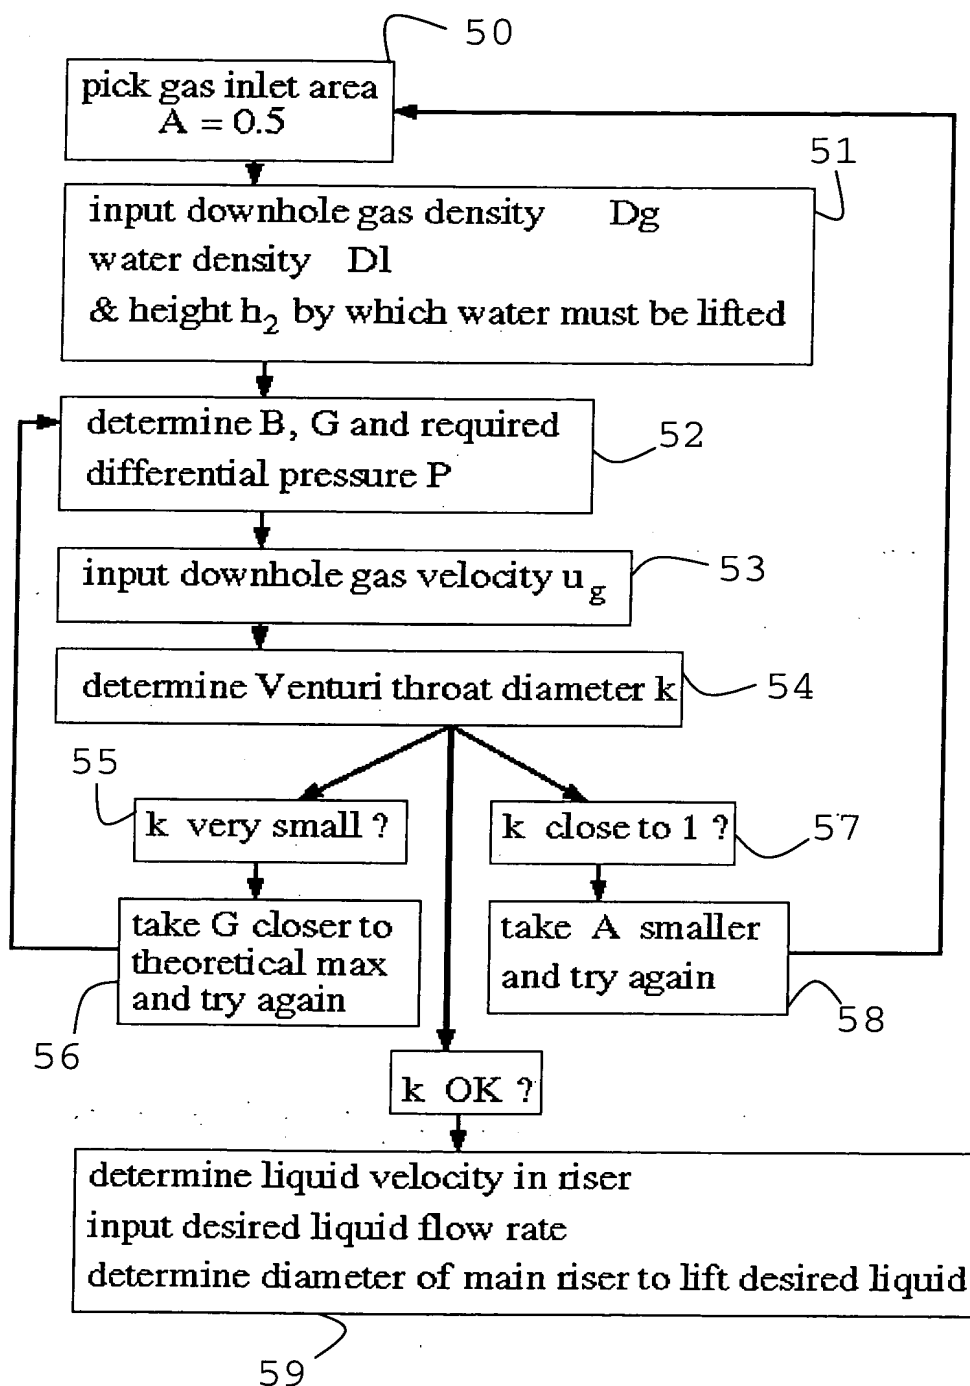


FIG. 5

THIS PAGE BLANK (USPTO)

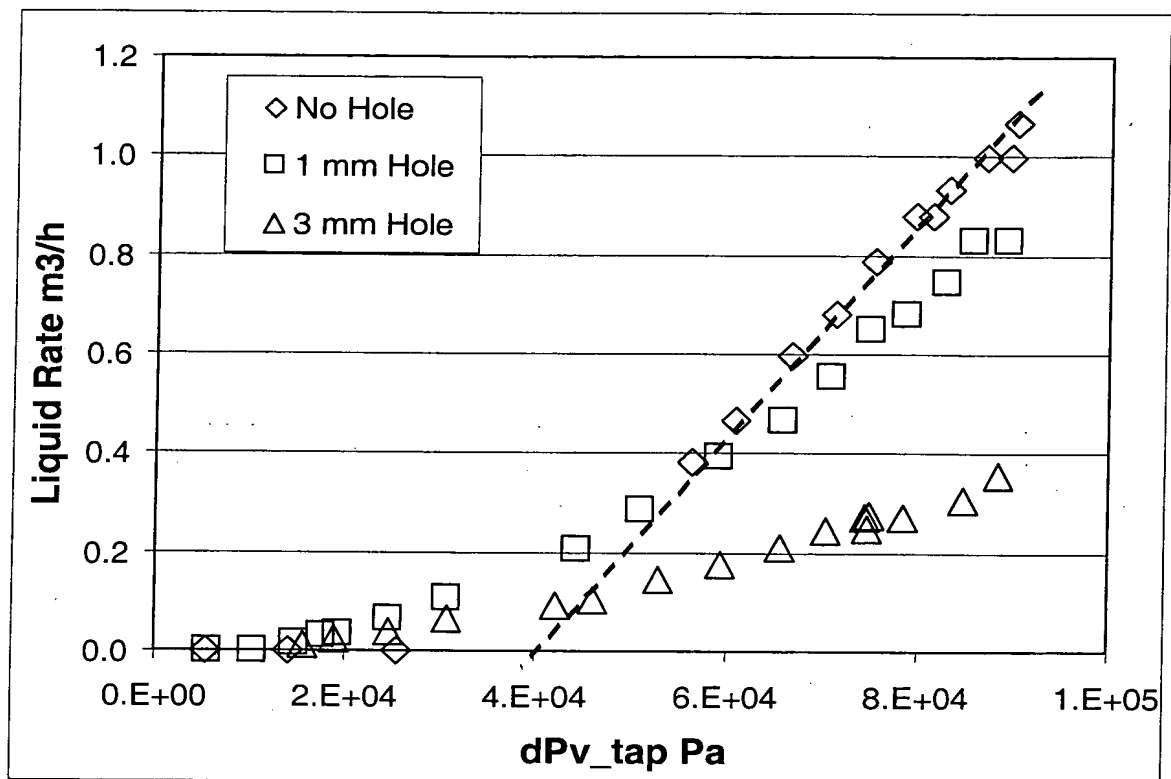

60

FIG. 6

THIS PAGE BLANK (USPTO)

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

THIS PAGE BLANK (USPTO)